

Your partner:

Enquiry **Order**

Reference no. (Customer)

Customer no.:	<input type="text"/>	Order address:	<input type="text"/>
Customer:	<input type="text"/>		<input type="text"/>
Contact person:	<input type="text"/>	Delivery address:	<input type="text"/>
Telephone:	<input type="text"/>		<input type="text"/>
E-mail:	<input type="text"/>	Requested delivery date:	<input type="text"/>


Edscha TS CS-ECO Roof

Basic roof components


DB-design reinforced according to EN 283 (see page 8)
Suitable for intermodal transport and tested by Deutsche Bahn German Railways

Stück
Anzahl der Dächer mit gleichen Parametern


Aufbaulänge: m




CS-ECO Standard *



CS-ECO Volume *



CS-ECO Universal *



**CS-ECO *
Universal Classic**

Standard body width: 2550 mm 2570 mm

Discrepant width, Special issue: mm

* Standard version in accordance with the current product description. Aluminium roof profiles are not included in the scope of delivery.

Construction components for rear (see page 10)

none

with End carriage

- Standard
- Small
- with locking assembly

Closure


- none
- Gantry beam (not for special width)
 - H: 130 mm
 - H: 190 mm
- End bow
- Adapter plate (for attaching customer specific gantry beams)

fixed mounted

- Gantry beam (not for special width)
 - H: 130 mm
 - H: 190 mm
- End bow

TailWing (see page 12)

- pre-assembled, complete
 - TailWing CS (400-900)
 - TailWing CS (901-1200)

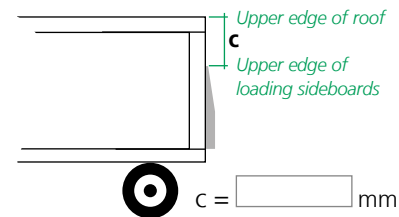

- Construction kit ≤ 2600 mm
 - TailWing CS (400-900)
 - TailWing CS (901-1200)

©All rights are held by European Trailer Systems GmbH, including those for patent applications. All powers of disposal, such as copying and dissemination rights, are held by us. Please note the copyright notice according to DIN ISO 16016!

Assembly kit (see page 10)

- Assembly kit CS-Standard front rear
- Assembly kit CS-Volume front rear
- Assembly kit CS-Universal front rear
- Assembly kit CS-Universal Classic front rear

Clamping strips (see page 10)

- Clamping strip kit (Standard/Volume/Universal) front
- Clamping strip kit (Standard/Universal) rear
- Clamping strip kit (Universal Classic) front & rear
- Clamping strip kit (Volume) rear

Optional construction components

Components are in reference to standard body width 2550 mm

- Front frame top** (see page 12)
- Tie rod** (see page 12)

Roof tarpaulin (see page 12)¹⁾

- Roof tarpaulin, recyclable (width = 2550 mm)
- Roof tarpaulin, recyclable (other dimensions)

Optional accessories (see page 14)

**** Attention!** Not suitable for Profile "Universal Classic"

Side tarpaulin roller CS-ECO **

- Side tarpaulin roller with clip Pcs.
- Side tarpaulin roller without clip Pcs.
- Side tarpaulin roller SPR-4 Pcs.
- Tarpaulin deflector plate (kit) Pcs.

Side tarpaulin roller CS-ECO Universal Classic

- Side tarpaulin roller (1) Pcs.
- Belt roller Pcs.
- Side tarpaulin roller (2) Pcs.

Stanchion roller carrier

- Stanchion roller carrier ** Pcs.
CS 125 / CS 175 (a)
- Stanchion roller carriage rotatable (b) Pcs.
- Stanchion roller carrier (c) Pcs.
(to be used with curtain roller 40 38 031 360 only)

- Roller with flap (d) Pcs.
- Stanchion roller carrier (e) Pcs.
- Stanchion roller carrier (f) Pcs.
- Stanchion roller carrier (g) Pcs.

Profile seal

Standard//Universal

- grey black

Roll

- 13700 x 125 mm Pcs.
- 18500 x 125 mm Pcs.

Volume

- grey black

Roll

- 13700 x 110 mm Pcs.
- 18500 x 110 mm Pcs.

Universal Classic

- grey black

Roll

- 14000 x 120 mm Pcs.
- 33000 x 120 mm Pcs.
- 33000 x 120 mm m

Consultation 1)
QuickCurtain
(separate from order)

Special lengths on request from the contractual partner

1) Attention: longer delivery times!